

# ProColor 653U

Touch technology and collaboration are brought to life with the brilliance of our 4K ultra-high-definition LCD flat panel Android display.



## Features

- Up to 20 single-point users or 10 dual-touch and gestures users with Touch 360° interactivity, driving collaborative learning to a new level\*
- Built-in high-power Android 8+ OS for touch control and wide selection of apps
- Access to MimioMarket app store
- 4K video resolution (3,840 x 2,160)
- LED backlighting for energy efficiency
- Includes several classroom software options with a collaboration app

## Options

- Internal Windows 10 compatible PC (available with Intel i5 or i7)  
*Windows 10 license not included*

\*Multi-touch is available on Windows systems, MacOS uses multi-touch gestures but can allow for multi-touch when used with software that has multitouch capabilities IE: MimioStudio. Linux and Chrome are single touch.

## Specifications

Dimensions and Weight	
<b>Overall Dimensions (W x H x D)</b>	1,489 mm x 897 mm x 86 mm (58.6 in. x 35.3 in. x 3.4 in.)
<b>Net Weight</b>	40.2 kg (88.7 lb)
<b>Packaged Dimensions (W x H x D)</b>	1,656 mm x 1,050 mm x 204 mm (65.2 in. x 41.3 in. x 8.03 in.)
<b>Gross Weight</b>	51.3 kg (113.1 lb)
<b>Effective Screen Size (W x H)</b>	1,428 mm x 803 mm (56.24 in. x 31.63 in.)
<b>Active Screen Size</b>	65 in. diagonal
Image	
<b>Screen Type</b>	LCD (IPS type)
<b>Display Format Native Resolution</b>	3,840 x 2,160
<b>Aspect Ratio</b>	16:9
<b>Picture Response Time (Gray to Gray)</b>	8 ms
<b>Refresh Frequency</b>	60 Hz
<b>Pixel Pitch</b>	0.372 mm x 0.372 mm
<b>Panel Resolution</b>	3,840 x 2,160
<b>Display Colors</b>	1.07 B (10-bit)
<b>Brightness (Typical)</b>	350 cd/m <sup>2</sup>
<b>Contrast Ratio</b>	1,200:1
<b>Viewing Angle</b>	Hor. 178°, Ver. 178°
<b>Backlight Life</b>	Direct light-emitting diode (LED) illumination rated at 50,000 hours

Touch Tracking	
<b>Tracking Technology</b>	Touch 360° infrared
<b>Touch Points Operating Systems</b>	20-touch: Windows 7+ and MacOS (only in supported software) Single touch: Linux, Chrome
<b>Touch Tool</b>	Stylus, finger (even if gloved), or solid object
<b>Two-Pen-Two-Color</b>	Supported, application dependent
<b>Tracking Accuracy</b>	± 1.5 mm
<b>Writing Height</b>	< 3 mm
<b>Minimum Object Size</b>	3 mm
<b>Tracking Read Speed</b>	>125 frames/s
<b>Tracking Response</b>	≤10 ms
<b>Tracking Points</b>	32,767 x 32,767
<b>Driver Required</b>	No
Safety	
<b>Anti-Glare Glass</b>	Yes
<b>Protective Glass</b>	4 mm tempered glass Level 7 Mohs
Connections	
<b>Input/Output</b>	Input: <ul style="list-style-type: none"> <li>- HDMI 2.0 x 3</li> <li>- VGA x 1</li> <li>- PC analog audio 3.5 mm x 1</li> </ul> Output: <ul style="list-style-type: none"> <li>- HDMI x 1 (4K2K)</li> <li>- Analog 3.5 mm x 1</li> <li>- SPDIF digital audio output coax x 1</li> </ul> USB: <ul style="list-style-type: none"> <li>- USB 2.0 for Android x 2 in front</li> <li>- USB 2.0 for software updates only, 1 on side)</li> <li>- USB 3.0 x 3 (2 side, 1 front)</li> <li>- USB 2.0 Type-B for touch control x 2</li> </ul>

	Data and Control: - RS-232 x 1 - LAN RJ-45 (10/100/1000Mbps) x 1
<b>Control</b>	
<b>Network Controllable</b>	Boxlight NDMS compatible
<b>Audio</b>	
<b>Output</b>	12 W x 2 into internal 8 Ohm speakers
<b>Sound System</b>	Stereo
<b>Equalizer</b>	Yes
<b>Sound Status Memory</b>	Yes
<b>Balance</b>	Yes
<b>Environmental</b>	
<b>Storage Temperature</b>	-20° to 60° C (-4° to 140° F)
<b>Storage Humidity</b>	10% to 90%
<b>Operating Temperature</b>	0° to 40° C (32° to 104° F)
<b>Operating Humidity</b>	10% to 90%
<b>Power Requirement</b>	100–240 VAC 60/50 Hz
<b>Power Consumption</b>	185 W operating, <0.5 W sleep mode
<b>Mount</b>	
<b>Mounting Screw Size</b>	M8 x 25 mm
<b>VESA Form Factor</b>	600 x 400 mm
<b>Accessories</b>	
<b>HDMI Cable</b>	1 x 3 m

<b>AC Power Cable</b>	1 x 3 m
<b>USB Cable</b>	1 x 5 m
<b>Passive Stylus</b>	2 x magnetic
<b>Remote Control</b>	1 (with batteries)
<b>Android</b>	
<b>Version</b>	Android 8.0 Oreo
<b>CPU</b>	Dual core A73+, Dual Core A53
<b>GPU</b>	Quad Core Mali G51
<b>RAM</b>	4 GB
<b>ROM</b>	32 GB
<b>App Store</b>	Yes, MimioMarket App Store

## What's in the box:

### Hardware

- Magnetic Stylus x 2
- Remote Control with Batteries
- Wi-Fi Module
- ProColor Wallmount-003

### Documentation

- Warranty Card
- QuickStart Guide

### Cables

- HDMI cable (3 m)
- USB A-to-B for touch (5 m)
- US power cord (3 m)



#### Software Options

- MimioConnect - 3 Year License
- MimioStudio Software - Perpetual License
- MimioMobile Collaboration App - 3 Year License
- OKTOPUS - Perpetual License
- OKTOPUS Blend, Collaboration App & Premium Lessons - 3 Year License


#### Display Apps

- MimioMarket - App Store
- MimioMessage - Announcement App (Coming Soon)
- Unplug'd - Screen Casting
- Basic Network Device Management


#### Online Professional Development Courses : [Learn More](#)

- ProColor3 Interactive Flat Panel
- OKTOPUS Basics
- OKTOPUS GamesZones
- OKTOPUS Blend
- MimioStudio Basics
- MimioConnect

## Drawings

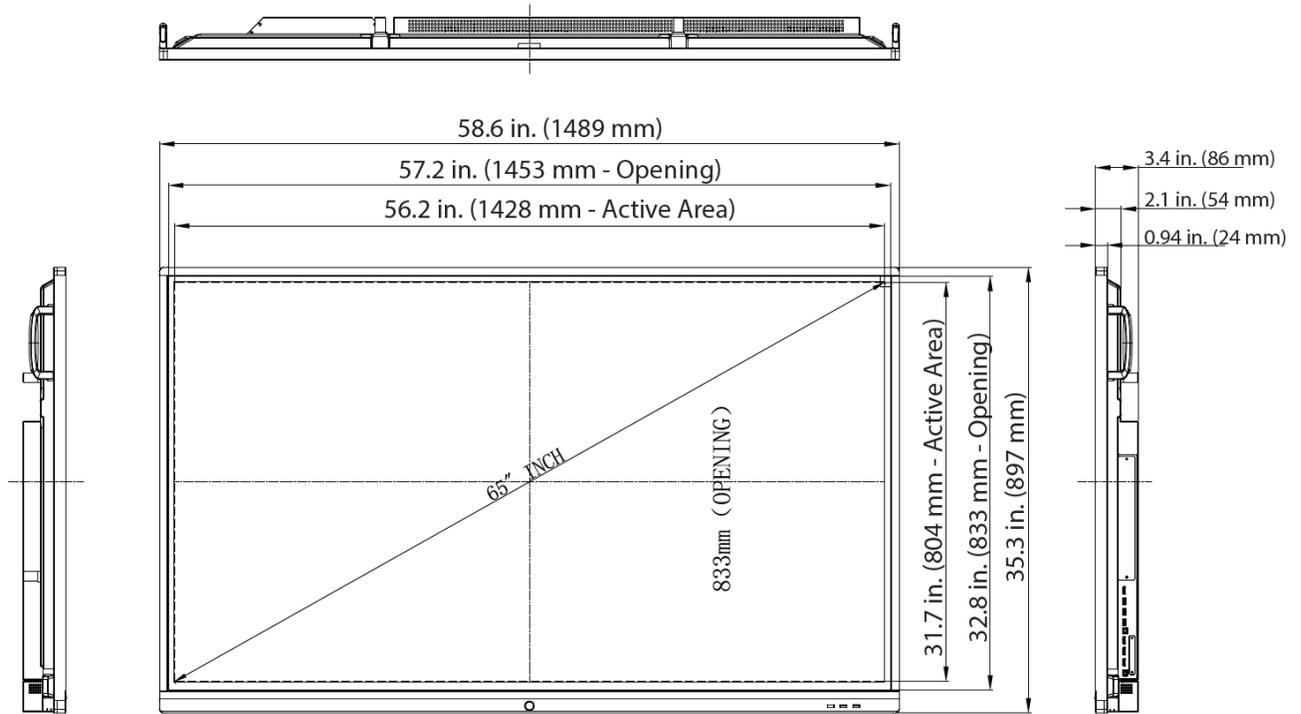

## Connections

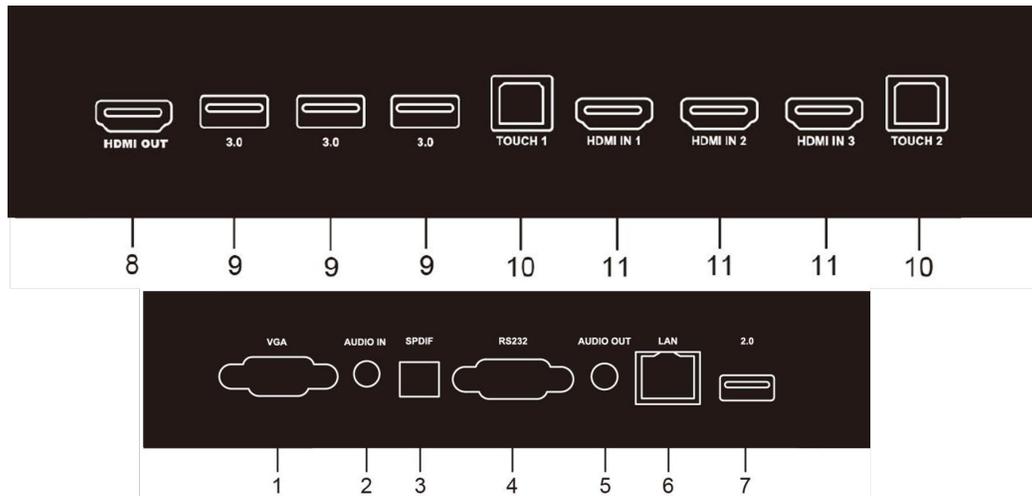

Number	Items	Function description
1	VGA	External computer image input
2	AUDIO IN	External computer audio input
3	SPDIF	Carry multichannel sound via optical signals.
4	RS232	Serial interface, used for mutual transfer of data between devices
5	AUDIO OUT	Audio output to the external speaker
6	LAN	Connect RJ45 terminals
7	2.0	USB 2.0, connect USB devices such as mobile hard disk, U disk, USB keyboard and mouse, USB drives, etc.
8	HDMI OUT	Connect to the devices with HDMI input function
9	3.0	USB 3.0, connect USB devices such as mobile hard disk, U disk, USB keyboard and mouse, USB drives, etc.
10	TOUCH	Touch signal output to the external computer
11	HDMI IN	High-definition multimedia interface signal input, connect to devices with HDMI output interface (personal computer with HDMI output, set-top box, or another video device)
12	AC IN	AC power input, connect AC power supply
13	AC SWITCH	To open or shut down AC power supply. "I" means power on, "O" means power off

*Please note: ProColor Series 3 flat panels can only be used horizontally in a table top for 90 minutes before needing to be returned to a vertical position. They must remain in a vertical position for a minimum of 30 minutes before they can put into a tilted configuration again.*

Specifications are subject to change without notice.